


Parallel Surge Protective Device (SPD)

LS-E2403D

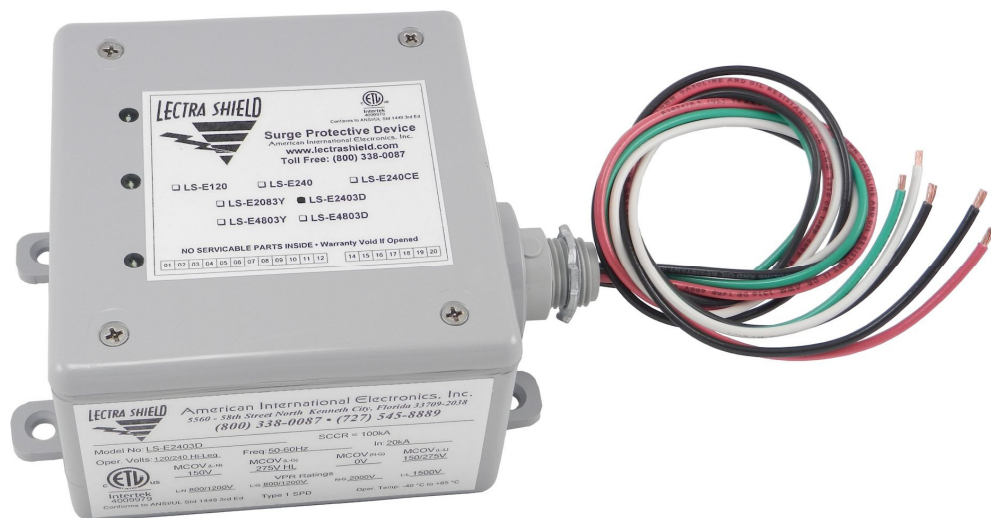


- Hardwire Protector
- Type 1 Surge Protective Device
- 120/240 Volts AC Hi-Leg
- Non-Load Bearing
- Parallel
- High Bright LED Status Indicators

- 5 Wires, 12 AWG
- Operating Temp. -40 to +85°C
- Protection Modes: L-L, L-N, L-G, N-G
- Max. Surge Current (8x20 μ s): 300kA Total
- Response Time: <5 ns
- Weight: \approx 1.5 lb

- The LectraShield LS-E2403D is an industrial strength, multi-layered thermally fused hybrid design, parallel three phase 120/240 volt hi-leg delta surge protector with a status indicator light (LED) for each phase. This product is designed to automatically reset after dissipating a surge within ratings. In the event this unit should self-sacrifice one or more of the LEDs will go out at which point the SPD needs to be replaced.

Dimensions and Diagram

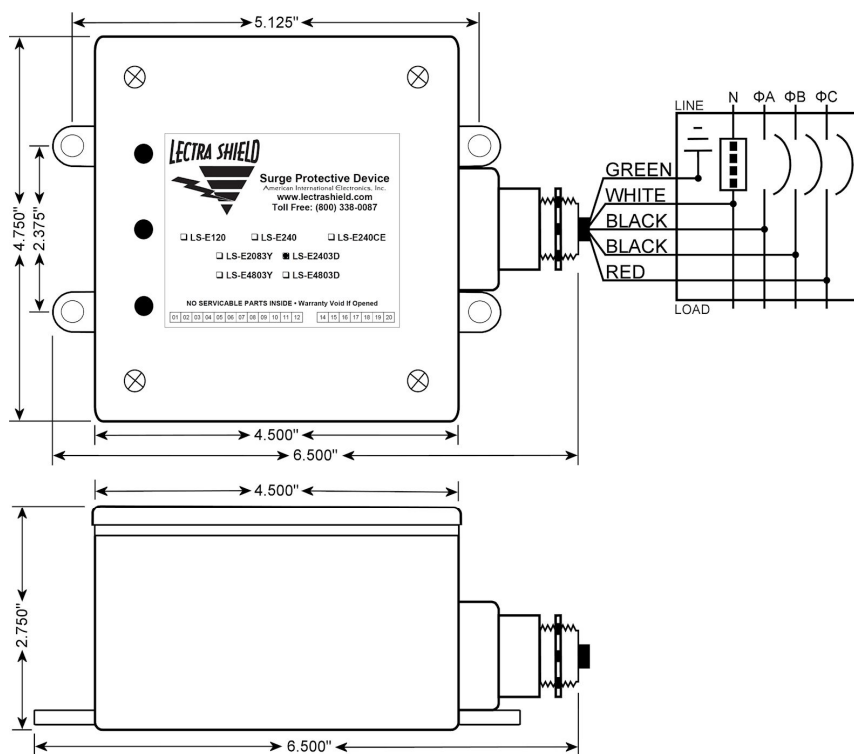

Characteristics

Part Number	Operating Voltage	Frequency	I _n	SCCR	VPR				MCOV			
					(L-N)	(L-G)	(N-G)	(L-L)	(L-N)	(L-G)	(N-G)	(L-L)
LS-E2403D	120/240 V Hi-Leg	50-60 Hz	20 kA	100 kA	800/1200	800/1200	2000	1500	150 V	275 V HL	0 V	150/275 V



Intertek
4009979
Conforms to ANSI/UL
Std 1449 4th Ed